


TPI-1

3 fázová LED signálka / Three phase indicator


Parameters / Technické parametre:

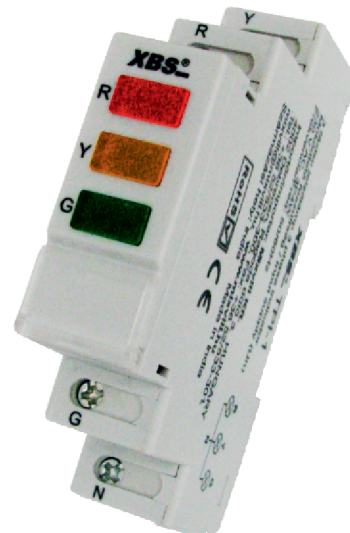


Supply Voltage (中) / Menovité napätie	230 VAC
Supply Variation / Rozsah výchylky menovitého napätia	-25 to +10% (of中) / -25 až +10 percent
Frequency / Frekvencia	50/60Hz
Power Consumption (Max.) / Maximálna spotreba	1.8 W
Number of Indications / Počet fáz	3
LED Colour / Farby LED signálok	Red / červená Yellow / žltá Green / zelená
	R Phase / Fázis Y Phase / Fázis B Phase / Fázis
LED Size / Rozmer LED	3mm
Operating Temperature / Pracovná teplota	- 15°C to +60 °C
Storage Temperature / raktározási hőmérséklet	- 25°C to +80 °C
Humidity (Non Condensing) / Vlhkosť	95% (Rh) / -95 percent
Enclosure / Ház	Flame Retardant UL94-V0 / Lángálló
Dimension (W x H x D) (in mm) / Rozmer	17.5 X90X 65
Weight (unpacked) / Váha	75 g
Mounting / Montáž	Base / DIN rail / DIN lišta
Certification / Tanúsítványok	 
Degree of Protection / Kytie	IP20 for Terminals, IP40 for Enclosure / IP20 sínre-, IP40 elosztóba szerelve
EMI / EMC / Megfelelősségi tanúsítványok: Harmonic Current Emissions ESD Radiated Susceptibility Electrical Fast Transients Surges Conducted Susceptibility Voltage Dips & Interruptions (AC) Conducted Emission Radiated Emission	IEC 61000-3-2 IEC 61000-4-2 IEC 61000-4-3 IEC 61000-4-4 IEC 61000-4-5 IEC 61000-4-6 IEC 61000-4-11 CISPR 14-1 CISPR 14-1
	Ed. 3.0 (2005-11) Class A Ed. 1.2 (2001-04) Level II Ed. 3.0 (2006-02) Level III Ed. 2.0 (2004-07) Level IV Ed. 2.0 (2005-11) Level IV Ed. 2.2 (2006-05) Level III Ed. 2.0 (2004-03) Level I, II, III, IV & V Class A, Level 6 Class B Ed. 5.0 (2005-11) Class A Ed. 5.0 (2005-11) Class A
Environmental Cold Heat Dry Heat Vibration Repetitive Shock Non-Repetitive Shock	IEC 60068-2-1 IEC 60068-2-2 IEC 60068-2-6 IEC 60068-2-27 IEC 60068-2-27
	Ed. 6.0 (2007-03) Ed. 5.0 (2007-07) Ed. 7.0 (2007-12) 5g Ed. 4.0 (2008-02) 40g, 6ms Ed. 4.0 (2008-02) 30g, 15ms

MOUNTING DIMENSIONS (mm)

ROZMER

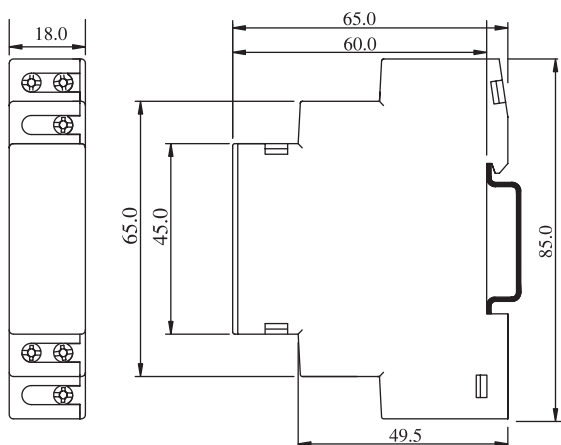

 R 3.5...4.0 mm	Torque - 0.6 N.m (6 Lb.in) Terminal screw - M3
 AWG	Solid Wire - 1 X 1...4 mm ² 1 X 18 to 10

Drawing / Schéma zapojenia:

